

Model: GL12-100(12V 100Ah)

GL Series

VLRA High Rate Discharge Battery



Legacy Canadian products designed in Canada, assembled in China.

Connecting To Legacy


📍 Laval-Quebec-Canada

📍 Beirut-Lebanon

📍 Hongkong-China

🔍 www.connectinglegacy.com

Introduction	GL12-100(12V 100Ah)
Length	328±2mm (12.9 inches)
Width	172±2mm (6.77 inches)
Height	215±2mm (8.46 inches)
Total Height	220±2mm (8.66 inches)
Weight	Approx. 28.5 Kg (Tolerance±5%)
Terminal	Default F12(M8), F5(M8) and L7(Optional), Value: 10~12N*m
Container Material	A.B.S. UL94-HB, <UL94-V0 Optional>
Design Life	12 years
Application	UPS/EPS, Telecom, Power grid, Medical equipment, Emergency light and Security system etc.

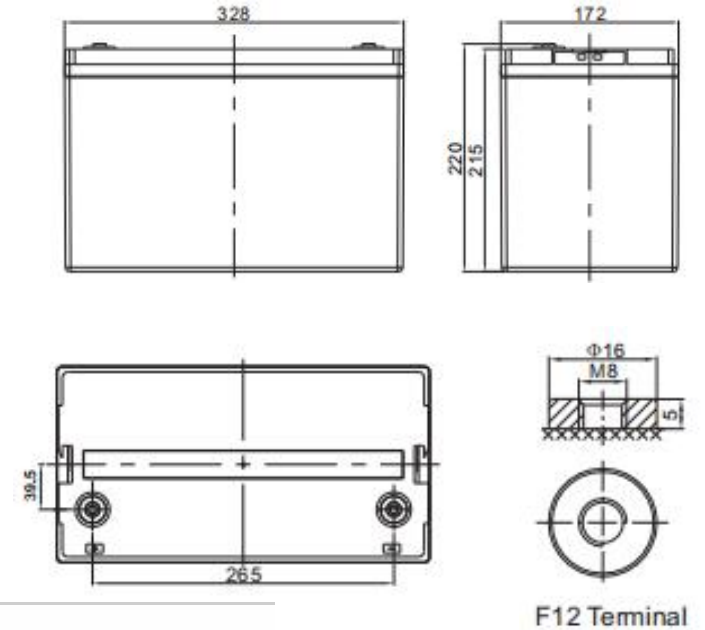

Features	<p>Structure: Compact design of shorter internal connectors among cells for lower I.R.</p> <p>Plate: Pasted flat type with patent high rate formula of AM supports stable performance during high current discharge.</p> <p>Separator: Improved AGM separator increases deep cycle life.</p> <p>Safety Valve: Flame arrester/filter is equipped with safety valve system.</p> <p>Design and manufacture with DIN standards by Legacy team, for heavy load discharge applications.</p>
----------	---

GL12-100 Dimension


Parameters	GL12-100 (12V 100Ah)			
Cell Per Unit	6			
Voltage Per Unit	12V			
Nominal Capacity	100Ah @10hour-rate to 1.80V per cell @25°C			
Internal Resistance	≤5.5 mΩ(Full Charge Condition @25°C)			
Max. Discharge Current	1000A (5 sec)			
Max. Charging Current	30.0A			
Short Circuit Current	2150A			
Reference Capacity	C3:75.0Ah	C5:85.0Ah	C10: 100.0Ah	C20: 106.0Ah
Floating Charging Voltage	13.5 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell			
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell			
Normal Operating Temperature Range	25°C±5°C			
Operating Temperature Range	Discharge and Storage : -20°C~60°C Charge: 0°C~50°C			
Self Discharge	Monthly Self-discharge ratio is less than 3% at 25°C			
Note	Legacy GL batteries can be stored for up to 6 months at 25°C and recharging is recommended. Please charged batteries before using.			



GL12-100 Imagine


F.V/TIME	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	231.9	185.4	109.5	61.1	36.4	28.2	22.2	18.9	12.7	10.5	5.52
1.65V	219.1	177.3	105.1	59.0	35.2	27.3	21.6	18.4	12.5	10.4	5.43
1.70V	201.7	166.0	100.5	57.1	34.1	26.6	21.0	17.9	12.3	10.3	5.36
1.75V	184.6	154.5	96.0	55.0	32.9	25.8	20.4	17.4	12.2	10.1	5.30
1.80V	167.1	142.7	91.8	52.9	31.7	25.0	19.9	17.0	12.0	10.0	5.25
1.85V	136.6	118.4	79.1	47.4	29.1	23.1	18.5	15.9	11.2	9.41	4.98

F.V/TIME	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	394.1	324.1	198.9	114.8	69.0	53.9	42.6	36.4	24.8	20.7	10.9
1.65V	379.6	314.5	193.0	111.5	67.1	52.4	41.6	35.6	24.5	20.5	10.7
1.70V	355.9	298.9	186.3	108.6	65.3	51.2	40.6	34.8	24.2	20.2	10.6
1.75V	331.6	282.2	179.9	105.2	63.3	49.9	39.7	34.0	23.9	20.0	10.5
1.80V	305.4	264.3	173.7	101.8	61.3	48.6	38.7	33.2	23.6	19.8	10.4
1.85V	254.1	222.4	151.1	91.9	56.5	45.1	36.1	31.1	22.2	18.6	9.87




Constant Current Discharge
Ah/Cell (@ 77°F/25°C)

Model: GL12-100




Constant Power Discharge
W/Cell (@ 77°F/25°C)


Discharge Characteristics Curve

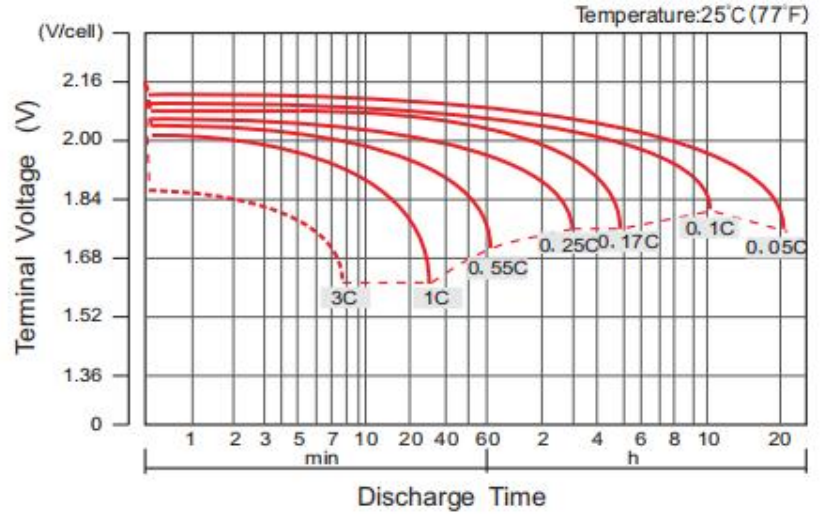


Charge Characteristics Curve For Standby Use(IU)

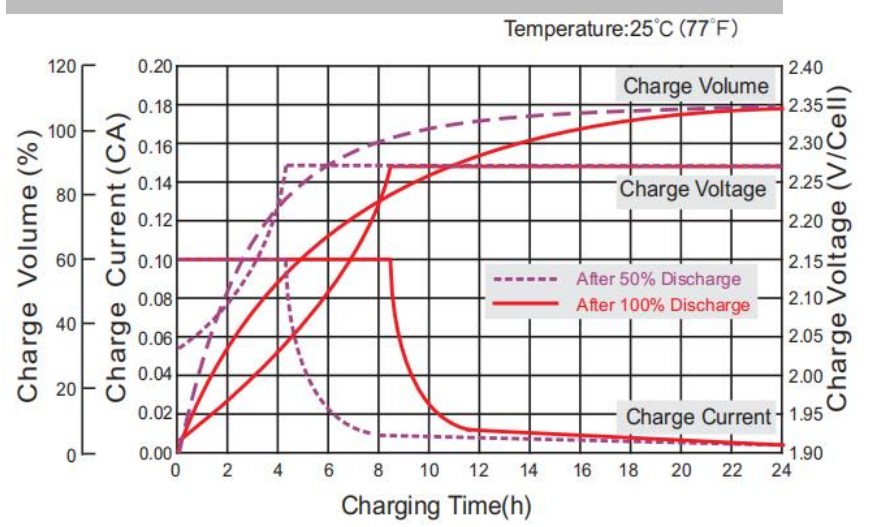

Cycle Life in Relation to Depth of Discharge

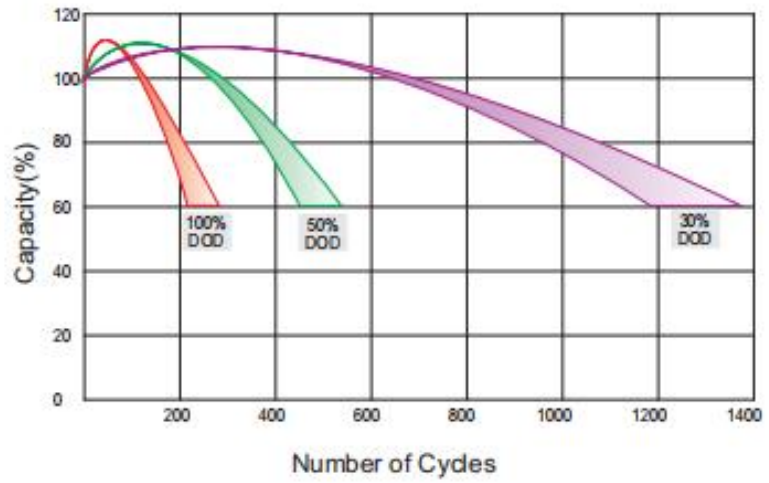


Relationship Between Charging Voltage and Temperature

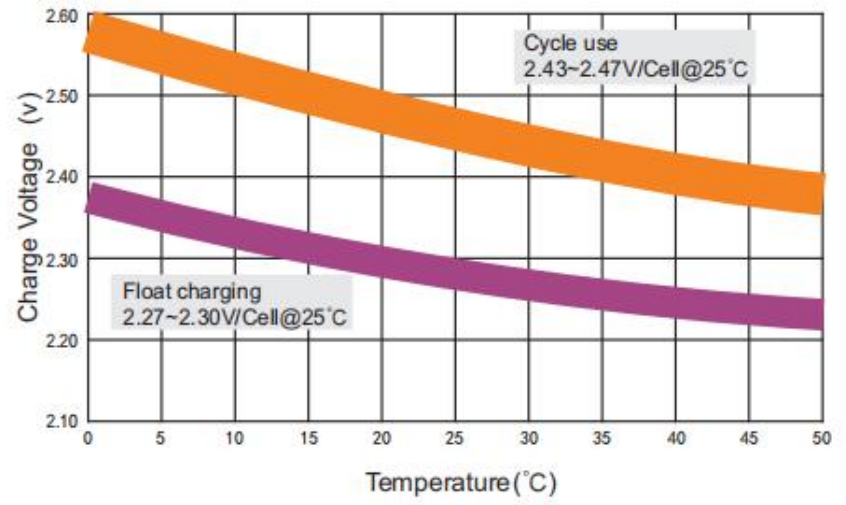


Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Legacy reserves the right to explain and update the latest information.


Life Characteristics of Standby Use

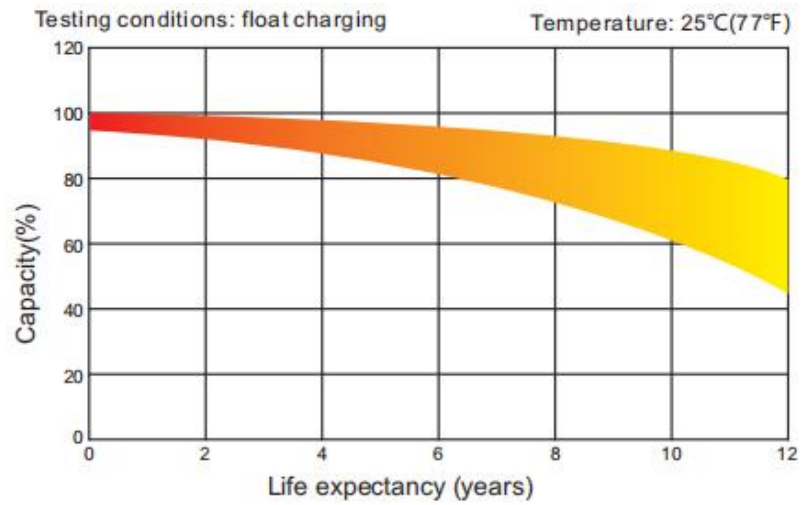


Storage Characteristics

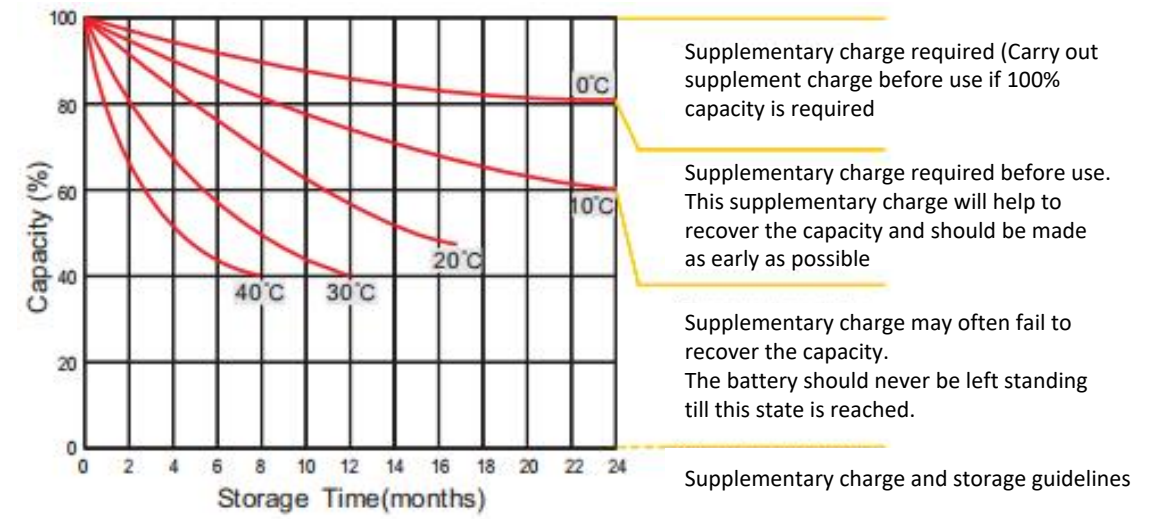

Effect of Temperature on Longterm life

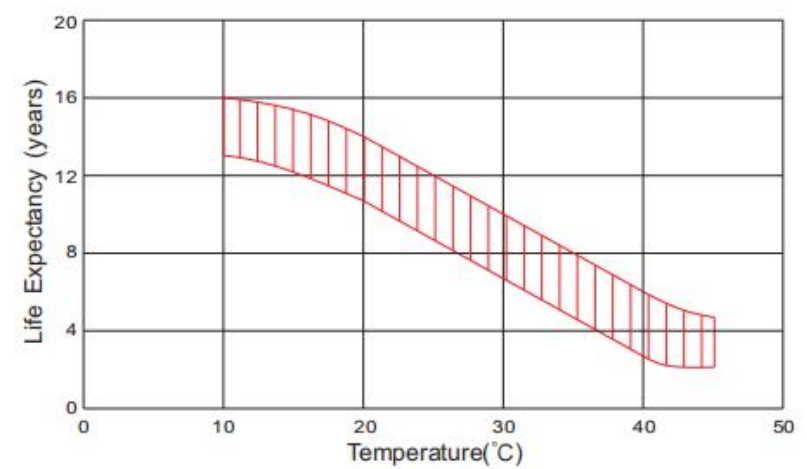

Temperautre Effects On Capacity

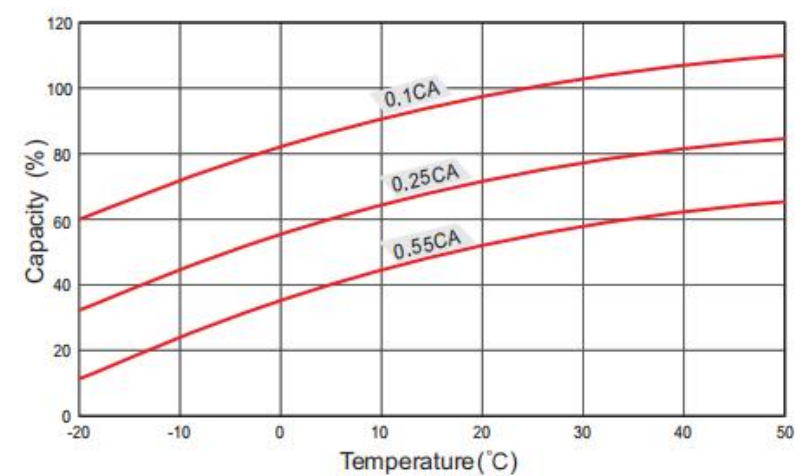

Note: The above data are average values, and can be obtained within 3 charge/ discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Legacy reserves the right to explain and update the latest information.



LET'S DEVELOP TRUST AND BUSINESS

Connecting To Legacy