

Model: GL12-225(12V 225Ah)

### **GL** Series



Legacy Canadian products designed in Canada, assembled in China.

VLRA High Rate Discharge Battery

# Connecting To Legacy Laval-Quebec-Canada Beirut-Lebanon Hongkong-China www.connectinglegacy.com



Introduction	GL12-225(12V 225Ah)		,	LEGAICT
Length	522±2mm (20.6 inches)			
Width	240±2mm (9.45 inches)	522		240
Height	219±2mm (8.62 inches)			
Total Height	224±2mm (8.82 inches)		219	224
Weight	Approx. 61.0 Kg (Tolerance±5%)			
Terminal	Default F10(M8), F16(M8) and L6 (Optional), Value: 10~12N*m	205		Φ20
Container Material	A.B.S. UL94-HB, <ul94-v0 optional=""></ul94-v0>			- LO
Design Life	12 years	4		
Application	UPS/EPS,Telecom,Power grid,Medical equiment,Emergency light and Security system etc.			$\bigcirc$
Features	Structure: Compact design of shorter internal connectors among cells for lower I.R.			F10 Terminal
	Plate: Pasted flat type with patent high rate formula of AM supports stable performance du discharge.	GL12-225	Dimension	
	Separator: Improved AGM seperator increases deep cycle life.			
	Safety Valve:Flame arrester/filter is equipped with safety valve system.			
	Design and manufacture with DIN standards by Legacy team, for heavy load discharge applic		1	




Parameters	GL12-225 (12V 225Ah)					
Cell Per Unit	6					
Voltage Per Unit	12V					
Nominal Capacity	225Ah @10hour-rate to 1.80V per cell @25°C					
Internal Resistance	≤3.2 mΩ(Full Charge Condition @25°C)					
Max. Discharge Current	2250A (5 sec)					
Max. Charging Current	67.5A					
Short Circuit Current	3980A					
Reference Capacity	C3:168.9Ah C5:191.0Ah C10: 225.0Ah C20: 238.0Ah					
Floating Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell					
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell					
Normal Operating Temperature Range	25°C±5°C					
Operating Temperature Range	Discharge and Storage : -20°C~60°C Charge: 0°C~50°C					
Self Discharge	Monthly Self-discharge ratio is less than 3% at 25°C					
Note	Legacy GL batteries can be stored for up to 6 months at 25°C and recharging is recommended. Please charged batteries before using.					

GL12-225 Imagine



F.V/TIME	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	396.3	243.9	137.5	81.9	63.5	49.9	42.4	28.5	23.7	12.4
1.65V	378.9	234.2	132.8	79.3	61.5	48.5	41.3	28.2	23.4	12.2
1.70V	354.9	223.8	128.4	76.7	59.8	47.2	40.3	27.8	23.1	12.1
1.75V	330.2	213.9	123.7	74.0	58.0	46.0	39.3	27.4	22.8	11.9
1.80V	304.9	204.5	119.0	71.4	56.3	44.7	38.2	26.9	22.5	11.8
1.85V	253.0	176.1	106.7	65.4	52.0	41.5	35.7	25.3	21.2	11.2


F.V/TIME	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	692.8	443.1	258.3	155.2	121.2	95.8	81.8	55.7	46.7	24.4
1.65V	672.2	429.8	250.9	151.0	118.0	93.5	80.0	55.2	46.2	24.1
1.70V	639.0	415.0	244.3	146.8	115.3	91.3	78.2	54.5	45.5	23.8
1.75V	603.3	400.7	236.8	142.4	112.3	89.3	76.5	53.8	45.0	23.6
1.80V	564.9	386.8	229.0	138.0	109.3	87.1	74.8	53.0	44.5	23.4
1.85V	475.4	336.5	206.7	127.1	101.5	81.2	70.0	49.9	41.9	22.2

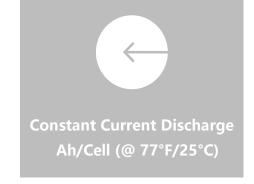


Model: GL12-225



#### **Discharge Characteristics Curve**

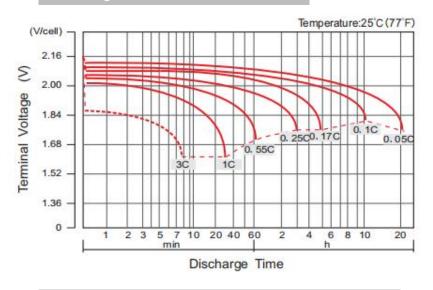


#### **Cycle Life in Relation to Depth of Discharge**

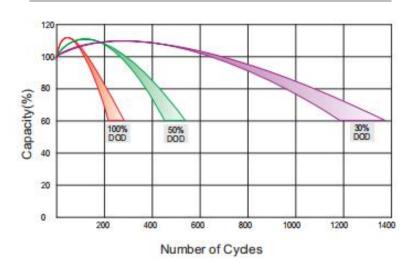


#### **Charge Characteristics Curve For Standby Use(IU)**



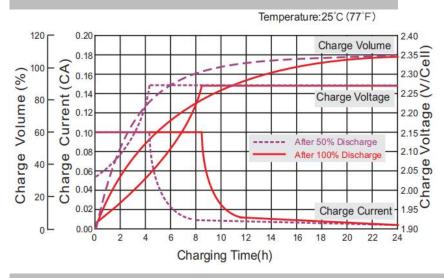


#### **Relationship Between Charging Voltage and Temperture**

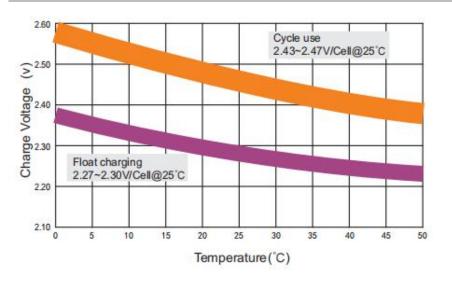


Note: The above datas are average values, and can be obtained within 3 charge / discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Legacy reserves the right to explain and update the lastest information.

#### **Life Characteristics of Standby Use**

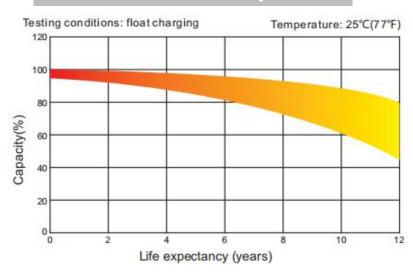


#### **Effect of Temperture on Longterm life**

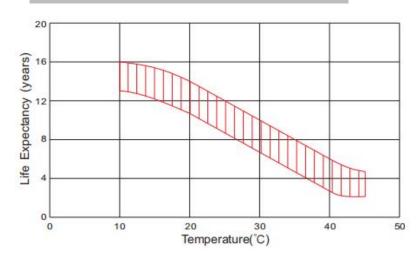

#### **Storage Characteristics**



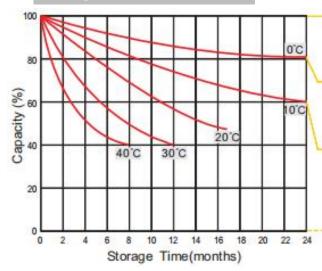


Supplementary charge required (Carry out supplement charge before use if 100% capacity is required

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible

Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this state is reached.

Supplementary charge and storage guidelines

#### **Temperautre Effects On Capacity**

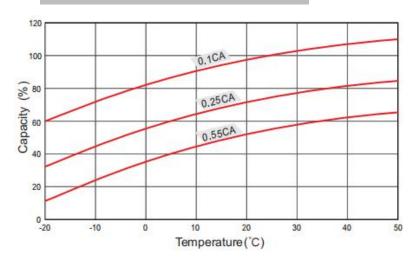

Note: The above datas are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Legacy reserves the right to explain and update the lastest information.



## LET'S DEVELOP TRUST AND BUSINESS

Connecting To Legacy